

Description

The LY523AA05UL is a uni-directional TVS diode, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive data and power line. It complies with IEC 61000-4-2 (ESD), $\pm 25\text{kV}$ air and $\pm 20\text{kV}$ contact discharge. It is assembled into a lead-free SOD-523 package. The small size and high ESD surge protection make it an ideal choice to protect cell phone, digital visual interfaces and other high speed ports.


Features

- Low clamping voltage
- Ultra low leakage current
- Operating voltage: 5V
- RoHS compliant
- IEC-61000-4-2 ESD $\pm 25\text{kV}$ Air, $\pm 20\text{kV}$ Contact
- Packaging: 7 inch reel, 3000pcs/reel


Applications

- Cellular Handsets and Accessories
- Ethernet 10/100/1000 Base T
- Personal Digital Assistants
- Notebooks
- USB Ports

Pin Configuration and Marking

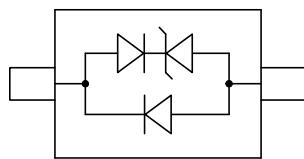

Circuit and Pin Schematic

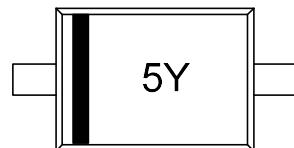

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$)

Parameter	Symbol	Value
Peak Pulse Power (8/20μs)	P_{PP}	75W
Peak Pulse Current (8/20μs)	I_{PP}	5A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	±25kV ±20kV
Ambient Temperature Range	T_A	-55°C to +125°C
Storage Temperature Range	T_{STG}	-55°C to +150°C

Electrical Characteristics ($T_A=25^\circ\text{C}$)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.
Reverse Working Voltage	V_{RWM}		-	-	5V
Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	6V	-	-
Reverse Leakage Current	I_R	$V_{RWM} = 5\text{V}$	-	-	0.5μA
Clamping Voltage	V_C	$I_{PP} = 1\text{A}$ (8/20μs)	-	-	10V
		$I_{PP} = 5\text{A}$ (8/20μs)	-	-	15V
Junction Capacitance	C_J	$V_R = 0\text{V}$, $f = 1\text{MHz}$	-	0.6pF	0.8pF

Typical Characteristic Curves ($T_A=25^\circ\text{C}$)

Figure 1. Peak Pulse Power Rating Curve

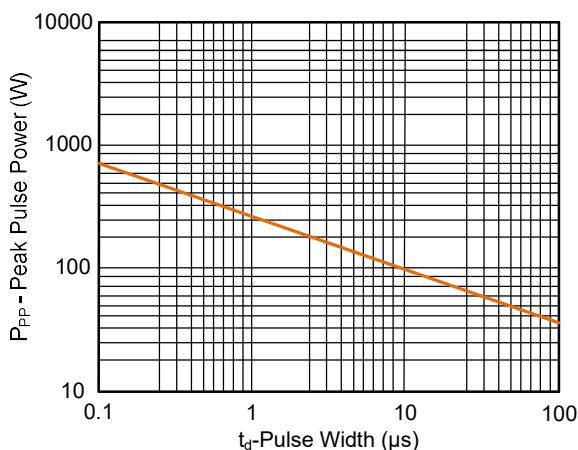


Figure 2. Pulse Derating Curve

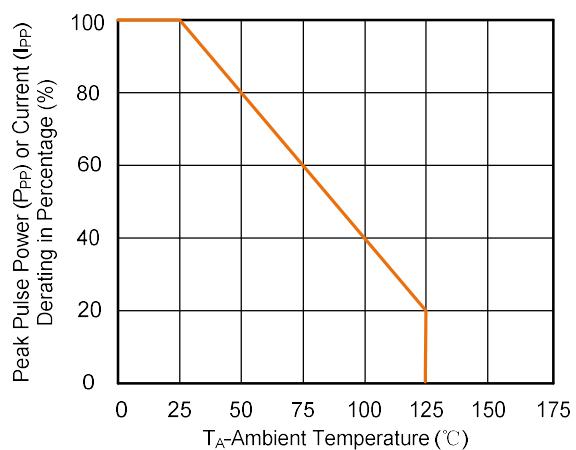


Figure 3. Clamping Voltage vs. Peak Pulse Current

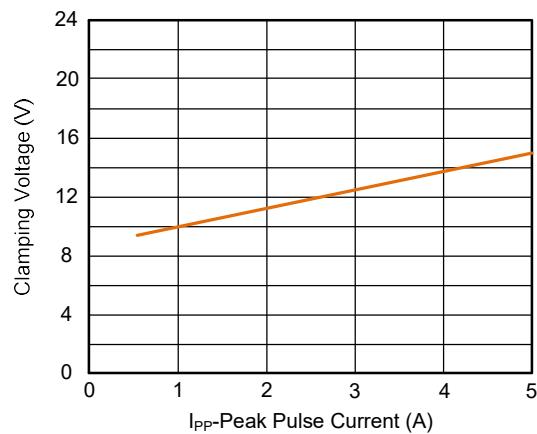


Figure 4. Junction Capacitance vs. Reverse Voltage

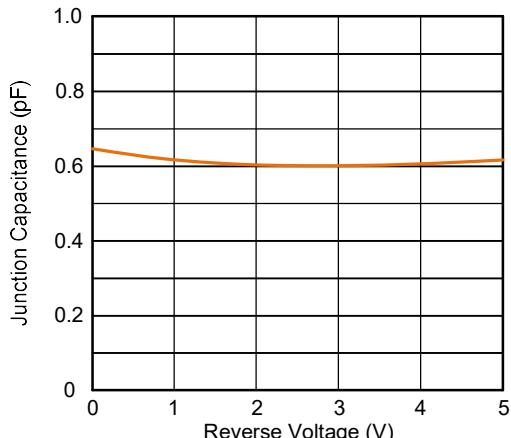


Figure 5. Pulse Waveform (8/20μs)



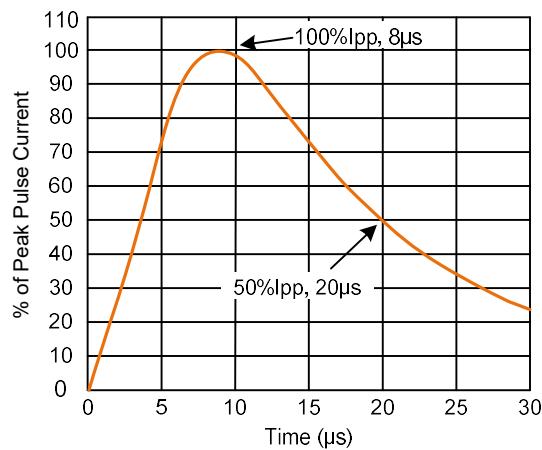


Figure 6. Pulse Waveform (IEC61000-4-2)

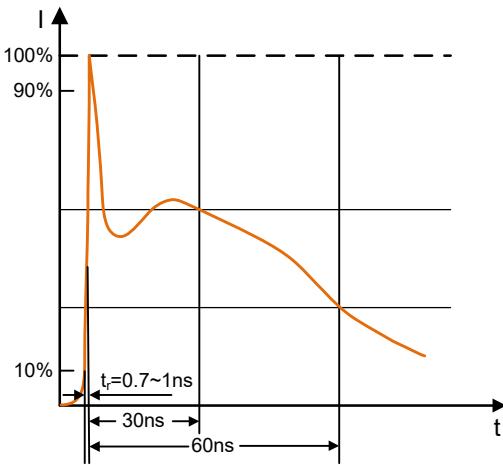


Soldering Parameters

Reflow Soldering

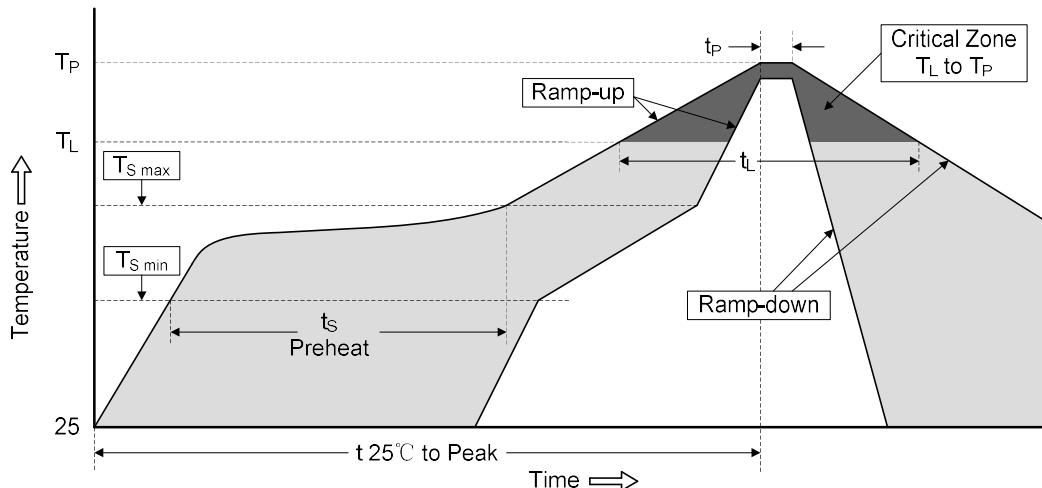

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T_L to T_P)	3°C/second max.
Preheat	
-Temperature Min ($T_{S\ min}$)	150°C
-Temperature Max ($T_{S\ max}$)	200°C
-Time (min to max) (t_s)	60-180 seconds
$T_{S\ max}$ to T_L	
-Ramp-up Rate	3°C/second max.
Time maintained above:	
-Temperature (T_L)	217°C
-Time (t_L)	60-150 seconds
Peak Temperature (T_P)	260°C
Time within 5°C of actual Peak Temperature (t_P)	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.

Dimensions (SOD-523)

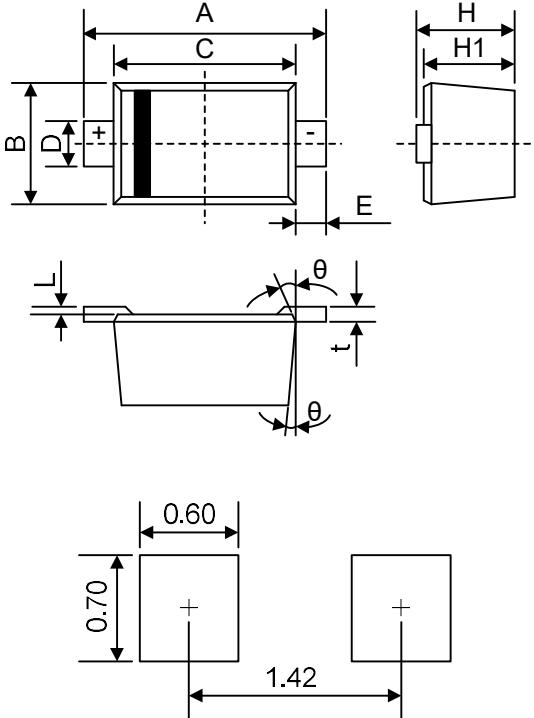

The diagram shows the physical dimensions of the SOD-523 package. It includes top and side views with labeled dimensions A, B, C, D, E, H, H1, and L. Below the main diagram is a recommended solder pad layout with two pads, each having a width of 0.60 mm, a height of 0.70 mm, and a center-to-center distance of 1.42 mm.

Recommended Solder Pad Layout (mm)

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.50	1.70	0.059	0.067
B	0.75	0.85	0.030	0.033
C	1.10	1.30	0.043	0.051
D	0.25	0.35	0.010	0.014
E	0.20 REF		0.008 REF	
H	0.51	0.77	0.020	0.031
H1	0.50	0.70	0.020	0.028
L	0.01	0.07	0.001	0.003
t	0.08	0.15	0.003	0.006
θ	7° REF		7° REF	