


5KP-Q Series

Axial Led – 5000W



Additional Information

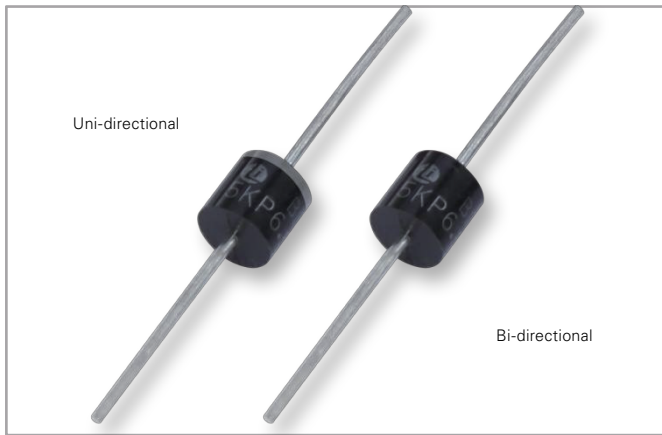

Resources



Accessories



Samples

Maximum Ratings and Thermal Characteristics

(T_A = 25 °C unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation by 10/1000µs Waveform(Fig.1) (Note 1)-Single Die Parts	P _{PPM}	5000	W
Power Dissipation on Infinite Heat Sink at T _L =75 °C	P _D	8	W
Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 2)	I _{FSM}	400	A
Maximum Instantaneous Forward Voltage at 100A for Unidirectional Only (Note 3)	V _F	3.5/5.0	V
Operating Temperature Range	T _J	-55 to 150	°C
Storage Temperature Range	T _{STG}	-55 to 150	°C
Typical Thermal Resistance Junction to Lead	R _{θJL}	8	°C/W
Typical Thermal Resistance Junction to Ambient	R _{θJA}	40	°C/W

Notes:

1. Non-repetitive current pulse, per Fig.3 and derated above T_J (initial) = 25 °C per Fig.2.
2. Measured on 8.3ms single half sine wave or equivalent square wave, duty cycle=4 per minute maximum.
3. V_F < 3.5V for single die parts and V_F < 5.0V for stacked-die parts.

Description

The 5KP-Q series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.


Features

- High reliability application and automotive grade AEC-Q101 qualified
- 5000W peak pulse power capability at 10/1000µs waveform, repetition rate (duty cycles):0.01%
- Glass passivated chip junction in P600 package
- Fast response time: typically less than 1.0ps from 0 Volts to V_B min
- Excellent clamping capability
- Typical failure mode is a short circuit
- Whisker test is conducted based on JEDEC JESD201A per its table 4a and 4c
- ESD protection of data lines in accordance with IEC 61000-4-2, 30kV(Air), 30kV (Contact)
- EFT protection of data lines in accordance with IEC 61000-4-4
- Low incremental surge resistance
- Typical I_R less than 2µA when V_B min > 12V
- High temperature to reflow soldering guaranteed: 260 °C/ 20~40sec./ 0.375"(9.5mm) lead length, 5 lbs., (2.3kg) tension
- V_B @ T_J = V_B @ 25 °C × (1 + α × (T_J - 25)) (α: Temperature Coefficient, typical value is 0.1%)
- Matte tin lead-free plated
- Halogen free and RoHS compliant
- Pb-free E3 means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/JEDEC J-STD 609A.01)

Applications

TVS components are ideal for the protection of I/O interfaces, V_{CC} bus and other vulnerable circuits used in telecom, computer, industrial ICT equipment and consumer electronic applications.

Functional Diagram

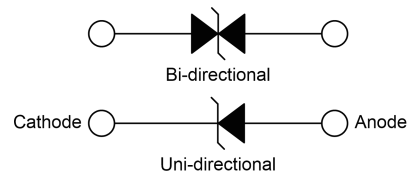

5KP-Q Series

Axial Leaded – 5000W

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Part Number		Type	Reverse Stand-Off Voltage	Breakdown Voltage @ I_T		Test Current	Maximum Clamping Voltage @ I_{PP}	Peak Pulse Current	Reverse Leakage @ V_R
Uni.	Bi.		$V_R(V)$	$V_{B \text{ Min.}}(V)$	$V_{B \text{ Max.}}(V)$	$I_T(mA)$	$V_C(V)$	$I_{PP}(A)$	$I_R(\mu A)$
5KP5.0A	5KP5.0CA	Q	5.0	6.40	7.00	50	9.2	554.3	5000
5KP6.0A	5KP6.0CA	Q	6.0	6.67	7.37	50	10.3	495.1	5000
5KP6.5A	5KP6.5CA	Q	6.5	7.22	7.98	50	11.2	455.4	2000
5KP7.0A	5KP7.0CA	Q	7.0	7.78	8.60	50	12.0	425.0	1000
5KP7.5A	5KP7.5CA	Q	7.5	8.33	9.21	5	12.9	395.3	250
5KP8.0A	5KP8.0CA	Q	8.0	8.89	9.83	5	13.6	375.0	150
5KP8.5A	5KP8.5CA	Q	8.5	9.44	10.40	5	14.4	354.2	50
5KP9.0A	5KP9.0CA	Q	9.0	10.00	11.10	5	15.4	331.2	20
5KP10A	5KP10CA	Q	10.0	11.10	12.30	5	17.0	300.0	15
5KP11A	5KP11CA	Q	11.0	12.20	13.50	5	18.2	280.2	2
5KP12A	5KP12CA	Q	12.0	13.30	14.70	5	19.9	256.3	2
5KP13A	5KP13CA	Q	13.0	14.40	15.90	5	21.5	237.2	2
5KP14A	5KP14CA	Q	14.0	15.60	17.20	5	23.2	219.8	2
5KP15A	5KP15CA	Q	15.0	16.70	18.50	5	24.4	209.0	2
5KP16A	5KP16CA	Q	16.0	17.80	19.70	5	26.0	196.2	2
5KP17A	5KP17CA	Q	17.0	18.90	20.90	5	27.6	184.8	2
5KP18A	5KP18CA	Q	18.0	20.00	22.10	5	29.2	174.7	2
5KP20A	5KP20CA	Q	20.0	22.20	24.50	5	32.4	157.4	2
5KP22A	5KP22CA	Q	22.0	24.40	26.90	5	35.5	143.7	2
5KP24A	5KP24CA	Q	24.0	26.70	29.50	5	38.9	131.1	2
5KP26A	5KP26CA	Q	26.0	28.90	31.90	5	42.1	121.1	2
5KP28A	5KP28CA	Q	28.0	31.10	34.40	5	45.4	112.3	2
5KP30A	5KP30CA	Q	30.0	33.30	36.80	5	48.4	105.4	2
5KP33A	5KP33CA	Q	33.0	36.70	40.60	5	53.3	95.7	2
5KP36A	5KP36CA	Q	36.0	40.00	44.20	5	58.1	87.8	2
5KP40A	5KP40CA	Q	40.0	44.40	49.10	5	64.5	79.1	2
5KP43A	5KP43CA	Q	43.0	47.80	52.80	5	69.4	73.5	2
5KP45A	5KP45CA	Q	45.0	50.00	55.30	5	72.7	70.2	2
5KP48A	5KP48CA	Q	48.0	53.30	58.90	5	77.4	65.9	2
5KP51A	5KP51CA	Q	51.0	56.70	62.70	5	82.4	61.9	2
5KP54A	5KP54CA	Q	54.0	60.00	66.30	5	87.1	58.6	2
5KP58A	5KP58CA	Q	58.0	64.40	71.20	5	93.6	54.5	2
5KP60A	5KP60CA	Q	60.0	66.70	73.70	5	96.8	52.7	2
5KP64A	5KP64CA	Q	64.0	71.10	78.60	5	103.0	49.5	2
5KP70A	5KP70CA	Q	70.0	77.80	86.00	5	113.0	45.1	2
5KP75A	5KP75CA	Q	75.0	83.30	92.10	5	121.0	42.1	2
5KP78A	5KP78CA	Q	78.0	86.70	95.80	5	126.0	40.5	2
5KP85A	5KP85CA	Q	85.0	94.40	104.00	5	137.0	37.2	2
5KP90A	5KP90CA	Q	90.0	100.00	111.00	5	146.0	34.9	2
5KP100A	5KP100CA	Q	100.0	110.00	123.00	5	162.0	31.5	2
5KP110A	5KP110CA	Q	110.0	122.00	135.00	5	177.0	28.8	2

Notes:

For bidirectional type having V_R of 10 volts and less, the I_R limit is double.

5KP-Q Series

Axial Leaded – 5000W

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 1:
Peak Pulse Power Rating Curve

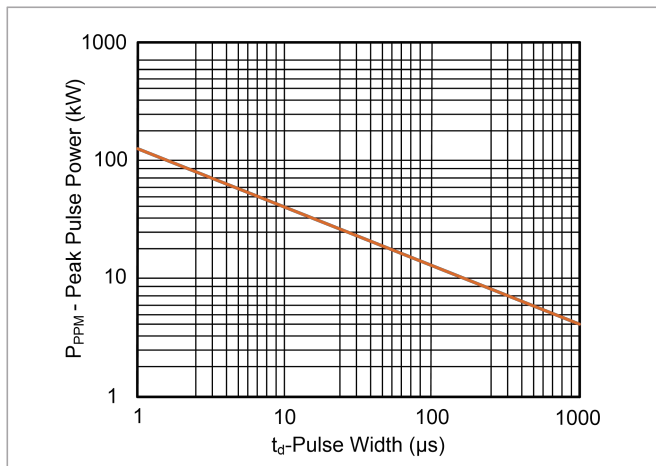


Figure 2:
Pulse Derating Curve

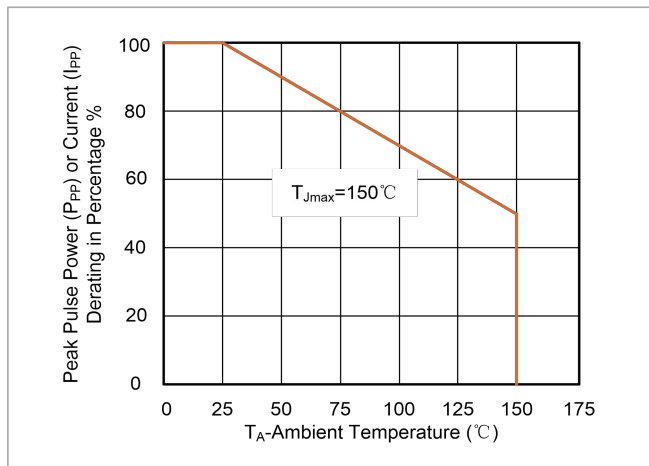


Figure 3:
Pulse Waveform

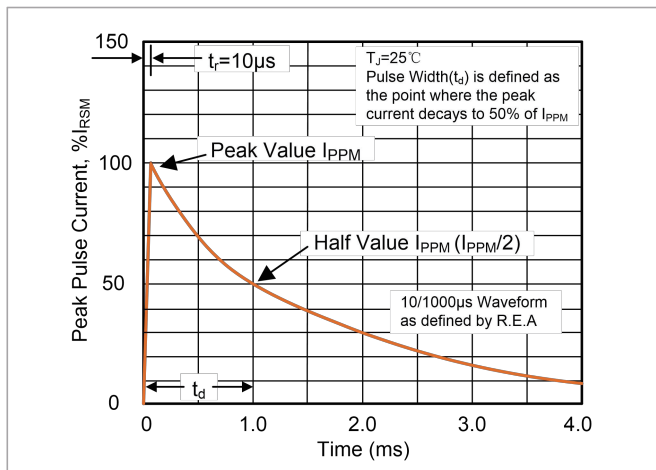


Figure 4:
Typical Junction Capacitance

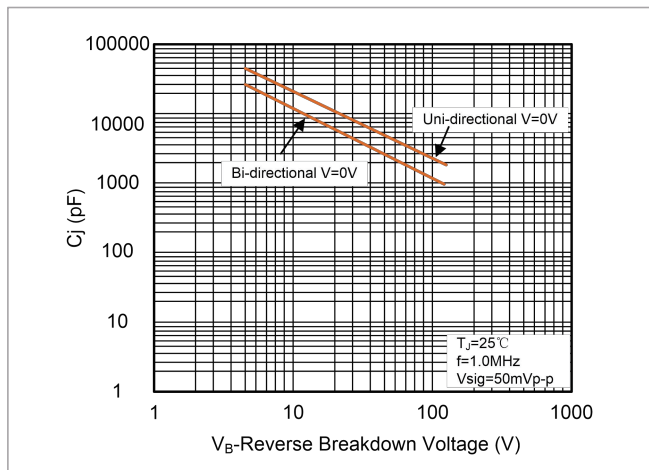


Figure 5:
Steady State Power Dissipation Derating Curve


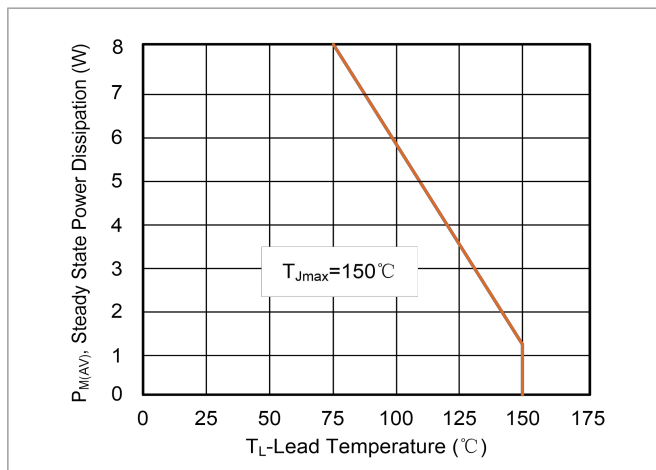


Figure 6:
Maximum Non-Repetitive Forward Surge Current Uni-Directional

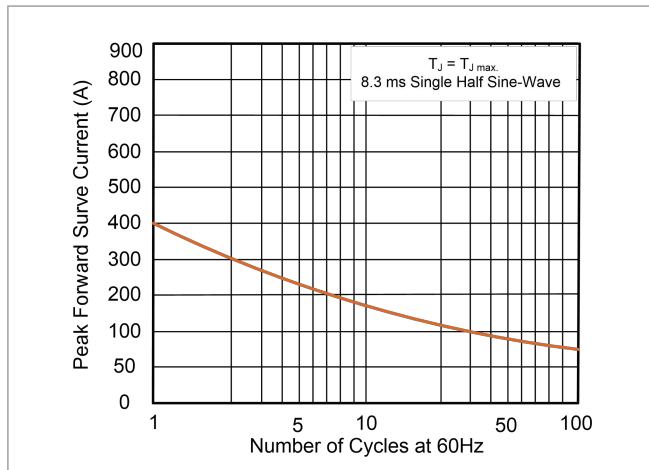


5KP-Q Series

Axial Leaded – 5000W

Soldering Parameters


Reflow Condition		Lead-free assembly
Pre Heat	-Temperature Min ($T_{S\ min}$)	150°C
	-Temperature Max ($T_{S\ max}$)	200°C
	-Time (min to max) (t_s)	60 – 180 secs
Average ramp-up rate(Liquidus Temp (T_L) to peak)		3°C/second max.
$T_{S\ max}$ to T_L -Ramp-up Rate		3°C/second max.
Reflow	-Temperature (T_L) (Liquidus)	217°C
	-Time (min to max) (t_L)	60-150 seconds
Peak Temperature (T_P)		260°C
Time within 5°C of actual Peak Temperature (t_P)		20-40 seconds
Ramp-down Rate		6°C/second max.
Time 25°C to Peak Temperature		8 minutes max.
Do not exceed		260°C

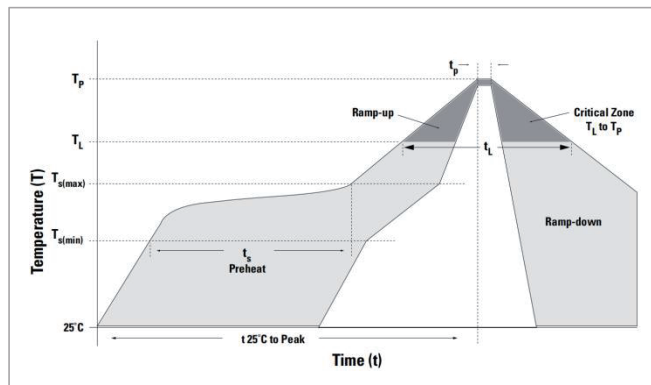

Flow/Wave Soldering (Solder Dipping)


Peak Temperature :	265°C
Dipping Time :	10 seconds (max.)
Soldering :	1 time

Dimensions

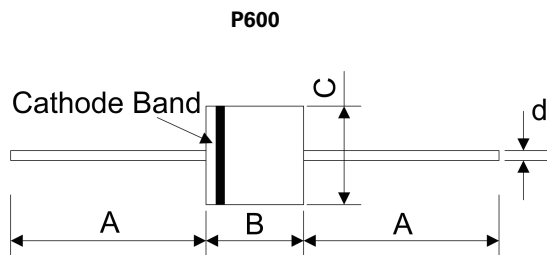


Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	25.40	-	1.000	-
B	8.60	9.10	0.340	0.360
C	8.60	9.10	0.340	0.360
d	1.19	1.35	0.047	0.053

Part Numbering System

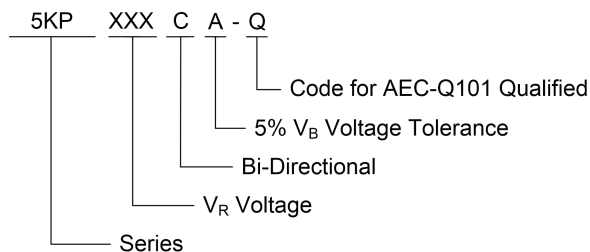

Part Marking System

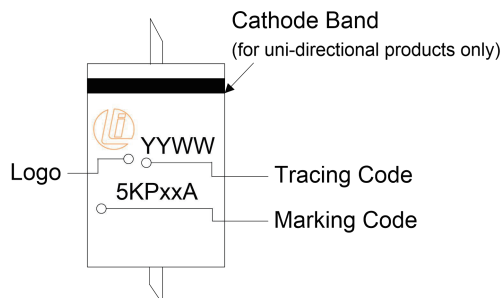


5KP-Q Series
Axial Leaded – 5000W

Packaging


Part number	Component Package	Quantity	Packaging Option	Packaging Specification
5KPxxxXX-Q/L/BOX	P600	300	Tape & Box	EIA STD RS-296
5KPxxxXX-Q/L/TR13	P600	800	Tape & Reel	EIA STD RS-296

Tape/Box/Reel Specification

Tape (Unit: mm)

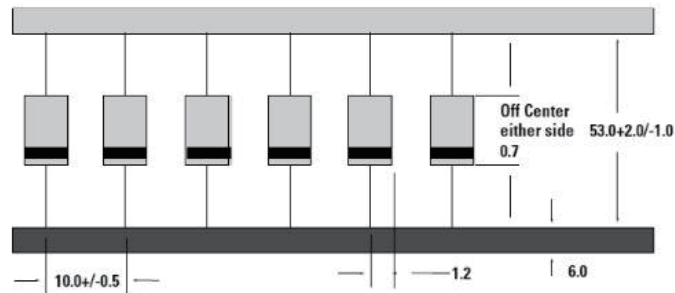


Box (Unit: mm)

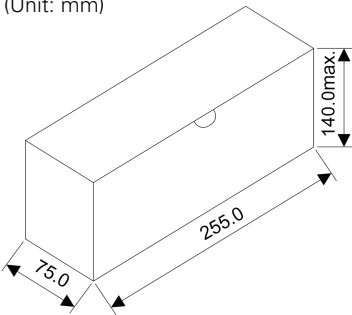

Quantity: 300pcs/box

Reel (Unit: mm)

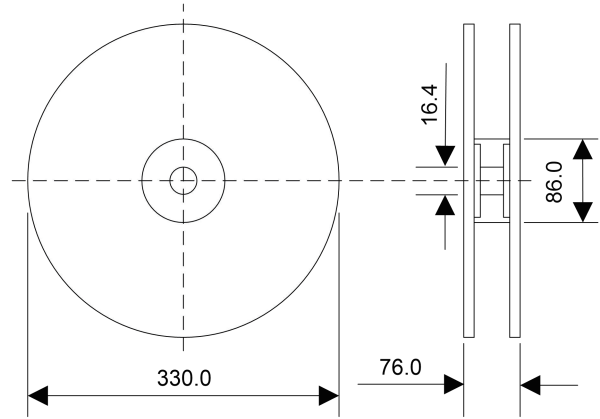

Quantity: 800pcs/reel

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Liown products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.liownsemi.com>